A B C D E

TOP

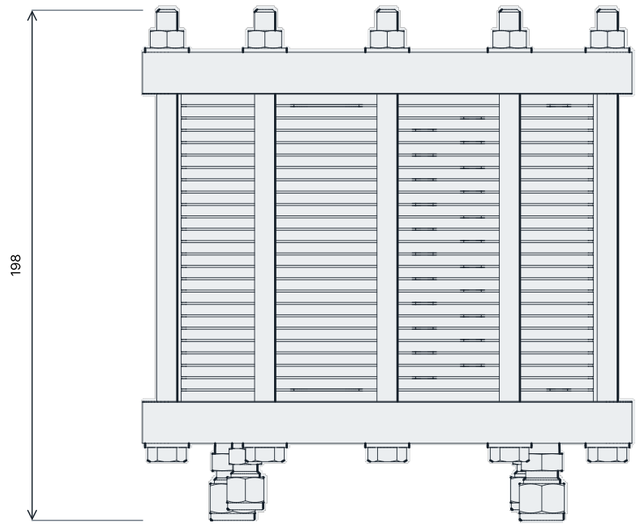

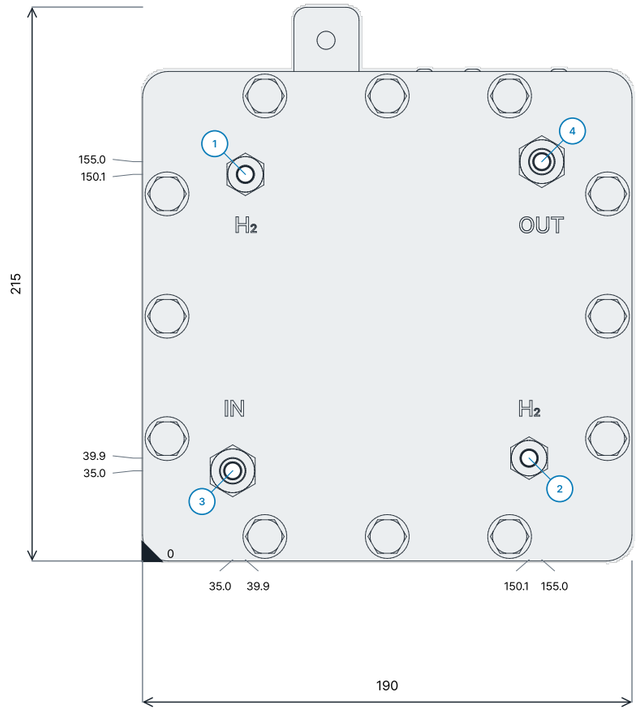

FRONT

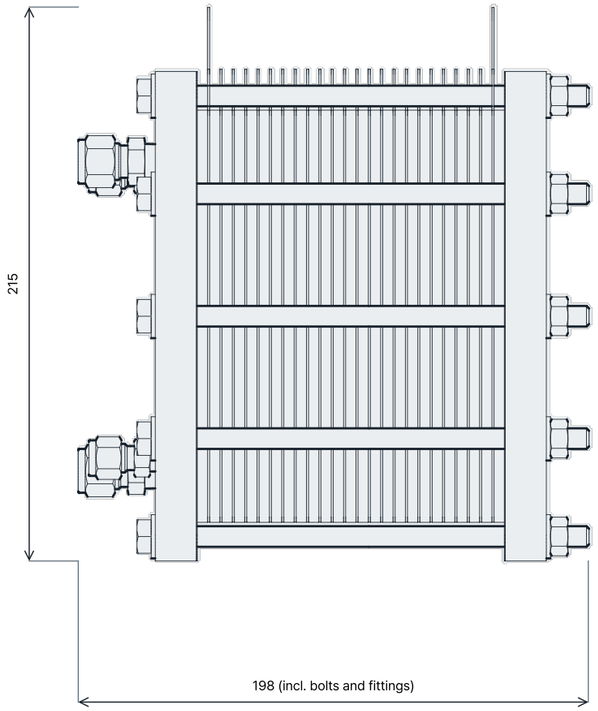

RIGHT

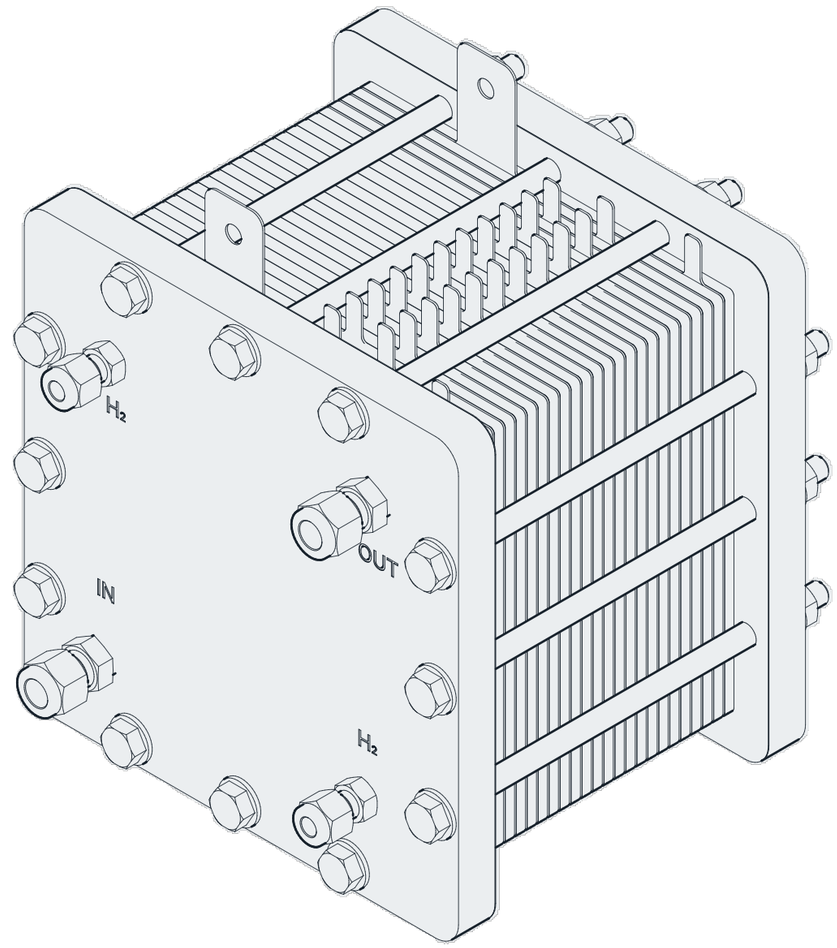

ISOMETRIC (NTS)

Fluid ports

No.	Function	Size
1	H_2 outlet 1	1/4″ double-ferrule
2	H_2 outlet 2	1/4″ double-ferrule
3	Electrolyte inlet	3/8″ PEEK tube
4	O_2 · electrolyte outlet	3/8″ PEEK tube

NOTES

1. Dimensions in mm. General tolerances ISO 2768-cK unless stated.
2. Port coordinates to port centres, from the front lower-left corner (0, 0).
3. Subject to change without notice. Check the latest drawing before installation.

HydroXpand

HXS-2 Outline

2 kW AEM electrolyser stack · outline drawing

Drawing no.	HX-DRW-HXS2-EN-001	Paper	**A3**
Revision	00 · 2026-09-29 · First issue	Sheet	1 / 1
Scale	**1:2**	Projection	Third angle
Drawn	J. Hyun	Checked	—
		Approved	J. Hyun

All information in this drawing is the property of HydroXpand and confidential. Do not copy or distribute without written permission.